


Drum capacity in meters

Free space mm.	30	30	30	30	30	30	30	40	50	60	60	60	60	70	70	80	90	100	Free space mm
Drum No:	R5	R6	R6T	R8	R9	R10	R10A	R11	R12	R14	R14A	R16	R16A	R18	R20	R22	R24	R26	Drum No:
Overall cable diam.mm																			Overall cable diam.mm
6	1000	2000																	6
8	560	1120	1295																8
10	360	720	850	1470															10
12	250	500	565	1020	1440														12
14	185	370	425	770	1105	1520													14
16		280		550	825	1160		1335											16
18				450	620	920	570	1010	1510										18
20				375	510	745	460	850	1100	1565	1065								20
22					420	615	380	700	885	1925	880	1645							22
24					340	515	320	580	830	1075	740	1380	870						24
26						440	270	470	685	905	630	1175	740	1485					26
28						380	235	440	555	745	540	985	635	1255	1685				28
30						330	205	345	525	705	470	930	555	1045	1375				30
32							180	330	410	560	415	755	490	980	1300	1565			32
34							160		395	545	370	735	430	825	1105	1350			34
36							140		370	420	330	580	385	765	1035	1265			36
38							130		285	405	295	560	345	630	860	1070	1570		38
40							115			390	265	445	310	605	830	1035	1355	2060	40
42										300	240	430	285	485	640	820	1255	1870	42
44										285	220	410	260	460	620	790	1065	1700	44
46											200	390	235	440	595	760	1025	1560	46
48											185	315	215	445	595	635	895	1430	48
50											170	300	200	340	460	605	855	1320	50
52											160	285	185	320	440	580	820	1220	52
54											145	285	170	320	420	550	665	1130	54
56											135		160	300	420	445	670	1050	56
58											125		150	300	420	425	635	980	58
60											120		140	215	400	425	640	915	60
62													130	215	310	400	500	860	62
64													120		290	405	500	805	64
66													115		290	380	475	755	66
68													110		275	295	475	715	68
70													100		275	275	445	675	70
72															255	275	360	635	72
74															260	275	360	600	74
76																255	335	570	76
78																255	335	540	78



Drum dimensions and weights

DRAKA NORSK KABEL drum No:	Flange diameter mm	Barrel diameter mm	Centerehole diameter mm	Interior width mm	External width mm	Maximum load kg	Weight without lagging approx kg	Weight with lagging approx kg
R5	500	200	75	300	380	200	13	18
R6	600	250	75	400	480	300	15	26
R6T	650	250	75	400	480	300	17	28
R8	800	375	75	500	604	500	24	40
R9	900	425	75	550	654	600	31	50
R10	1000	500	105	600	704	800	55	80
R10A	1000	700	105	600	750	800	64	105
R11	1100	575	105	650	754	850	62	101
R12	1200	675	105	850	982	1500	80	135
R14	1400	800	105	850	982	2000	105	170
R14A	1400	1000	105	850	1035	2000	119	186
R16	1600	950	105	850	1010	2500	250	333
R16A	1600	1200	105	850	1065	2500	273	351
R18	1800	1100	130	850	1010	3000	315	400
R20	2000	1300	130	1000	1160	3500	410	570
R22	2200	1400	130	1000	1160	4500	480	660
R24	2400	1400	130	1000	1184	5000	630	870
R26	2600	1500	130	1200	1500	10000	900	1170

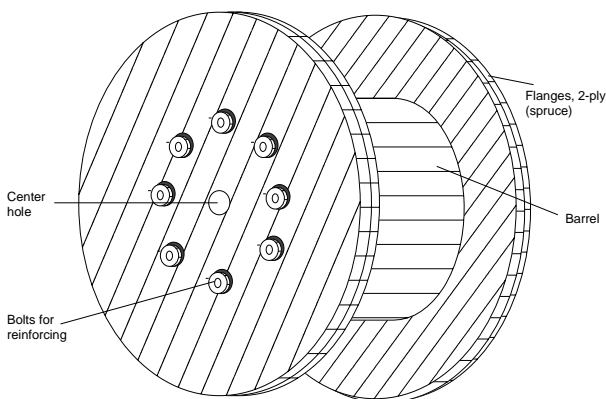

Material : spruce
 Flanges : 2-ply, 90° cross grain
 Barrel : reinforced with through-going bolts
 Center hole : each drum has a center hole (spindle)

All data are to continuous revision and may be implemented at any time.